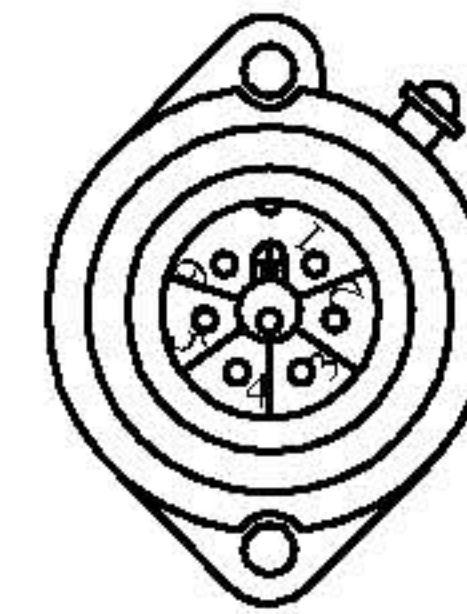


[illegible]

<i>Slewing Drive Performance Data</i>		
Rated Output Speed	0.0385 rpm	
Rated Output Torque	1029.6 N.m	759.4 lbf.ft
Tilting Moment Torque (Max.)	54.3 kN.m	40× 10 ³ lbf.ft
Holding Torque	43 kN.m	32× 10 ³ lbf.ft
Axial Load (Max.)	475 kN	107× 10 ³ lbf
Radial Load (Max.)	190 kN	43× 10 ³ lbf
Ratio of Worm Gear	78:1	
Tracking Precision	≤ 0.17 °	
<i>24VDC Planetary Reducer Motor Performance Data (24H/30/33)</i>		
Rated Voltage	24 VDC	
Rated Current	<1.2 A	
Gear Ratio	575:1	
IP Class	IP54	
Temperature	-40 - +80° C	
Noises	≤60 dB	

The diagram shows two digital signals, signal 1 and signal 2, plotted against an angle from 0° to 360°. Signal 1 is high from 0° to 90° and 180° to 270°, and low from 90° to 180° and 270° to 360°. Signal 2 is low from 0° to 90° and 180° to 270°, and high from 90° to 180° and 270° to 360°.

REV	DATE	REVISER	DESCRIPTION			
DESIGNED BY	WY	22-10-2012	RTR Engineering Co.,Ltd.			
CHECKED BY	XZL	22-10-2012				
APPROVED BY	Andy	22-10-2012				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	SLEWING DRIVE	
			24Kg	1:4		
SYMBOL ISO		SIZE	A3	SE12A-78-R-24H.30.33		REV
		SHEET	1 / 1			B